



- Resistances from 10hm to 10MOhms
- Power Rating 0.05 to 0.25Watt
- Resistance Tolerances to $\pm 0.5\%$
- TCR's to ± 50 ppm/K
- Non-Magnetic (contact PtAg)
- Suitable for Glueing or Soldering
- Sizes: 0402 / 0504 / 0603 / 0805 / 1206
- High Temperature Applications possible



Pb-free
Available
RoHS*
COMPLIANT

SPECIFICATIONS


Type (larger sizes upon request)		0402	0504	0603	0805	1206
Power Rating (W) ¹		0.05	0.10	0.10	0.125	0.25
Working Voltage (VAC)	Trimmed	30	50	75	100	200
	Untrimmed	100	150	220	300	600
Resistance Range (Ω)		Tolerances Available (%) Temperature Coefficients Available (\pm ppm/K) (lower TCR upon request)				
1 Ω - <10 Ω		10% to 20% 100 / 250	5% to 20% 100 / 250	5% to 20% 100 / 250	5% to 20% 100 / 250	5% to 20% 100 / 250
10 Ω - <100 Ω		5% to 10% 50 / 100	2% to 10% 50 / 100	2% to 10% 50 / 100	1% to 10% 50 / 100	1% to 10% 50 / 100
100 Ω - 1M		1% to 10% 50 / 100	1% to 10% 50 / 100	1% to 10% 50 / 100	0.5% to 10% 50 / 100	0.5% to 10% 50 / 100
>1M - 10M		5% to 20% 50 / 100	1% to 10% 50 / 100	1% to 10% 50 / 100	1% to 10% 50 / 100	1% to 10% 50 / 100

¹ W @ 70 °C / 0W @ 155 °C

Specification	Value
Temperature Range	-55°C to +155°C (extended range up to 250°C upon request)
Climactic Category	55 / 155 / 56
Solderability	250°C / 3s (up to 6 month after shipping resp. at storage in Nitrogen)
Max. Soldering Temperature	260°C / 10s

SPECIFICATIONS (continued)

Long Term Stability	Max ΔR	
	<10 Ω	10 Ω - 10M
Storage 125°C / 1000h	$\pm 1\%$	$\pm 0.5\%$
Storage 155°C / 1000h	$\pm 2\%$	$\pm 1\%$
Load Life / P=70% / 70°C / 1000h	$\pm 1\%$	$\pm 0.5\%$
Short term overload	$\pm 0.5\%$	$\pm 0.25\%$
Humidity / 96%RH / 40°C / 56 days	$\pm 1\%$	$\pm 0.5\%$

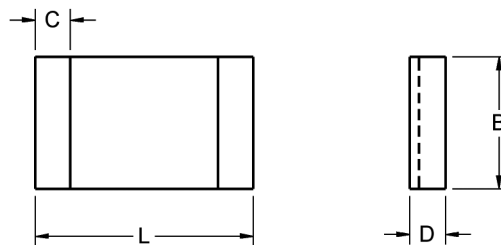


Type	Dimensions			
	L	B	D	C
CHR 0402	0.040 ± 0.006 [1.04 ± 0.15]	0.020 ± 0.006 [0.5 ± 0.15]	0.012 ± 0.002 [0.3 ± 0.05]	0.004 $+0.004 / -0.002$ [0.1 $+0.1 / -0.05$]
CHR 0504	0.050 $+0.006 / -0.002$ [1.25 $+0.15 / -0.05$]	0.040 $+0.006 / -0.002$ [1.0 $+0.15 / -0.05$]	0.012 $+0.006 / -0.002$ [0.3 $+0.15 / -0.05$]	0.008 $+0.008 / -0.004$ [0.2 $+0.2 / -0.1$]
CHR 0603	0.060 $+0.006 / -0.002$ [1.5 $+0.15 / -0.05$]	0.030 $+0.008 / -0.002$ [0.8 $+0.2 / -0.05$]	0.016 $+0.006 / -0.002$ [0.4 $+0.15 / -0.05$]	0.008 $+0.008 / -0.004$ [0.2 $+0.2 / -0.1$]
CHR 0805	0.080 $+0.006 / -0.002$ [2.0 $+0.15 / -0.05$]	0.050 $+0.006 / -0.002$ [1.25 $+0.15 / -0.05$]	0.016 $+0.006 / -0.002$ [0.4 $+0.15 / -0.05$]	0.012 $+0.008 / -0.004$ [0.3 $+0.2 / -0.1$]
CHR 1206	0.126 $+0.006 / -0.002$ [3.2 $+0.15 / -0.05$]	0.060 $+0.008 / -0.002$ [1.5 $+0.2 / -0.05$]	0.016 $+0.006 / -0.002$ [0.4 $+0.15 / -0.05$]	0.012 $+0.008 / -0.004$ [0.3 $+0.2 / -0.1$]

Packaging:

Bulk or Blister tape to IEC 60286-3

- Tape width 8mm / Reel Diameter 180 or 330mm
- Minimum quantity Bulk / 100 pieces per value
- Minimum quantity Tape & Reel / 1000 pieces per value

Power Derating Curve

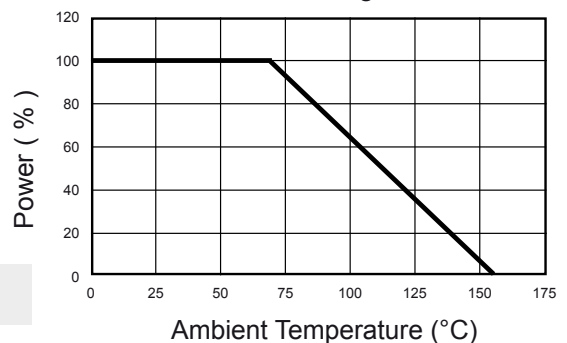

Ordering Information

Part Number - Resistance - Tolerance - TCR - Packaging

Example: CHR 0603 10 kOhms 5% 50ppm Tape

(Note: if no TCR is specified, the highest value will be supplied)

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.